



Long Haul/Regional/On & Off Road/Off Road/Urban

TRUCK&BUS TIRES

CATALOG 2023

Jinyu firmly adheres to the enterprise spirit, "Common benefit is above all" and the company's target of "Providing the customers with excellent quality products and a high level of service." We insist on focusing on our customer's demands, committing to our promises, operating ethically, and developing scientifically to maximize the common benefit of consumers, distributors, suppliers, employees, shareholders, communities, governments, enterprises and other related parties.

"Common benefit is above all"!



ENTERPRISE VISION



BLACKLION

TRUCK & BUS TIRE

Long Haul / Regional / On&Off Road / Off Road / Urban



To be the best tire supplier, trusted globally and able to provide the best value and experience to customers and end-users.



ENTERPRISE MISSION

Concentrate on rubber tire technology and service development and application;
Commit ourselves to providing customers the best value and experience.

ENTERPRISE INTRODUCTION

Enterprise Profile

JINYU Tire Group Co., Ltd. was founded in 1995, which is a professional tire R & D and manufacturing enterprise. The company has total assets of 5.5billion Yuan and there are more than 3500 employees. By equipped with advanced tire production, research and development, testing equipment and professional technology, management team, the company has established a sound quality management system. There are two plants respectively located in China and Vietnam with total capacity of 6 million pcs/year. The company has set up sales centers in North America, Europe, Vietnam and other countries in local operation. The sales network covers more than 100 countries and regions in the Middle East, Asia, Europe, the United States, Africa and so on.

Jinyu Certificates

The company has obtained certificates like CCC, DOT, ECE, INMETRO, ISO/TS16949, GCC, SONCAP, TBS, SARS and so on. The company's laboratory has been certified by CNAS and ISO/IEC 17025 and obtained many national Patents.

Research and Development

The company believes proving excellent quality is a way of life and takes every opportunity to instill this value throughout the entire enterprise. As proof of this commitment, a considerable investment has been made in R&D over the last 20 years. The R&D center not only utilizes advanced equipment but also commits to having efficient operations and maintaining a strong teamwork culture. The team is hyper-focused on marketing, product planning, formula research and development, as well as, structure design and product testing.

CONTENTS

06 BF188	07 BT165	09 BT168	10 BF155	11 BD175
12 BD176	13 BD177	14 BD165	15 BD186	16 BD187
17 BD170	18 BD171	19 BD173	20 BT188	21 BT107
22 BT160	23 BT180	24 BT161	25 BD278	26 BD218
27 BD210	28 BD280	29 BD260	30 BD216	31 BLG19

32 BD278	33 BD215	34 BD212	36 BA202	37 BA267
38 BA226	39 BA111	40 BA115	41 BLR01	42 BA122
43 BA125	44 BA220	45 BA106	46 BA162	47 BA105
48 BA127	50 BD273	51 BD285	52 BD189	53 BD266
54 BD270	55 BLM16	56 BD263	57 BD265	59 BC121
61 BU123	62 BU551	63 BLC58	65 BW290	66 BW291



BLACKLION PATTERN REFERENCE



Vehicle / Road	Long Haul	Regional	On & Off Road	Off Road	Coach & Urban
Steer	<p>06BF188 07BT165 09BT168 10BF155</p>	<p>11BD175 15BD186 16BD187 19BD173</p>	<p>26BD218 27BD210 28BD280 29BD260</p>		
Drive	<p>12BD176 13BD177 14BD165</p> <p>17BD170 18BD171 65BW290</p>	<p>20BT188 22BT160 23BT180 24BT161</p>	<p>30BD216 31BLG19 32BD278 33BD215 34BD212</p>		
Trailer	<p>21BT107</p>	<p>37BA267 38BA226 39BA111 40BA115</p>	<p>36BA202 41BLR01 40BA220</p>		
All-position	<p>45BA106 46BA162 66BW291</p>	<p>42BA122 43BA125 47BA105 48BA127</p>	<p>50BD273 51BD285 52BD189 53BD266</p>	<p>54BD270 55BLM16 56BD263 57BD265</p>	<p>59BC121 61BU123</p> <p>62BU551 63BLC58</p>

ALL STEEL RADIAL TIRE

BF188

Suitable Conditions

Medium and long mileage truck running on paved and highway roads



- Low Heat Generation
- High Wear Resistance
- Economy and Environment Friendly
- Outstanding Handling and Brake Performance on Wet



● suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
●	11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	16.5	1054	279
● ●	12R22.5	18	152/149 L	9.00	3550	3250	7830	7160	930	930	135	135	17	1085	300
●	11R24.5	14	146/143 L	8.25	3000	2725	6610	6005	720	720	105	105	16.5	1104	279
● ●	11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	16.5	1104	279
●	205/75R17.5	14	124/122 M	6.00	1600	1500	3525	3310	750	750	110	110	13	753	204
● ●	215/75R17.5	16	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
●	235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
●	245/70R17.5	18	143/141 J	7.50	2725	2575	6005	5675	875	875	125	125	13	789	248
● ●	225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
●	245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	13	839	248
● ●	265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	13.5	867	262
●	285/70R19.5	18	150/148 K	8.25	3350	3150	7390	6945	900	900	130	130	14	895	283
● ●	255/70R22.5	16	140/137 M	7.50	2500	2300	5510	5070	830	830	120	120	12.5	930	255
●	275/70R22.5	16	148/145 M	8.25	3150	2900	6940	6395	900	900	130	130	15	958	276
● ●	275/80R22.5	18	149/146 L	8.25	3250	3000	7160	6610	900	900	130	130	16	1012	276
●	295/60R22.5	18	150/147 L	9.00	3350	3075	7390	6780	900	900	130	130	15	926	292
●	295/75R22.5	14	144/141 L	9.00	2800	2575	6175	5675	760	760	110	110	16.5	1014	298
●	295/75R22.5	16	146/143 L	9.00	3000	2725	6610	6005	830	830	120	120	16.5	1014	298
●	295/80R22.5	18	152/149 M	9.00	3550	3250	7825	7165	900	900	130	130	16	1044	298
●	315/60R22.5	18	152/148 L	9.75	3550	3150	7825	6945	900	900	130	130	14.5	950	313
●	315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7390	900	900	130	130	15.5	1014	312
●	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8050	850	850	125	125	17	1076	312
●	315/80R22.5	20	156/150 L (154/150 M)	9.00	4000	3350	8820	7390	850	850	125	125	17	1076	312
●	285/75R24.5	14	144/141 L	8.25	2800	2575	6175	5675	760	760	110	110	16.5	1050	283
●	285/75R24.5	16	147/144 L	8.25	3075	2800	6780	6175	830	830	120	120	16.5	1050	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BT165

Suitable Conditions

Medium and long mileage trucks running on paved and highway roads



- Ultra Wear Resistance
- Outstanding High Speed Performance
- Excellent Durability



● suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
●		8.5R17.5	12	121/120 M	6.00	1450	1400	3195	3085	625	625	90	90	11	802	215
●		9.5R17.5	18	143/141 J	6.75	2725	2575	6005	5675	875	875	125	125	13.5	842	240
●		10R22.5	16	144/142 L	7.50	2800	2650	6175	5840	900	900	130	130	14.5	1020	254
●		11R22.5	16	148/145 M	8.25	3150	2900	6945	6395	840	840	120	120	17	1054	279
●		12R22.5	18	152/149 L	9.00	3550	3250	7825	7165	930	930	135	135	17	1085	300
●		13R22.5	18	154/151 K	9.75	3750	3450	8270	7605	830	830	120	120	17	1124	320
●		9R22.5	14	136/134 M	6.75	2240	2120	4940	4675	830	830	120	120	13.5	974	229
●		225/90R17.5	14	130/128 L	6.75	1900	1800	4190	3970	760	760	110	110	13.5	851	226
●	●	205/75R17.5	14	124/122 M	6.00	1600	1500	3525	3310	750	750	110	110	13	753	205
●	●	215/75R17.5	16	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
●	●	235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
●		245/70R17.5	18	134/132 L	7.50	2120	2000	4675	4410	900	900	130	130	13	789	248
●		225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
●		245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	13	839	248

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
●		265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	13.5	867	262
●		285/70R19.5	18	150/148 K	8.25	3350	3150	7390	6945	900	900	130	130	13	895	283
●		255/70R22.5	16	140/137 M	7.50	2500	2300	5510	5070	830	830	120	120	13.5	930	255
●		275/70R22.5	18	148/145 M	8.25	3150	2900	6940	6395	900	900	130	130	14.5	958	276
●		295/60R22.5	18	150/147 L	9.00	3350	3075	7390	6780	900	900	130	130	14.5	926	292
●	●	295/80R22.5	18	154/149 M	9.00	3750	3250	8270	7160	850	850	125	125	16	1044	298
●		315/60R22.5	18	152/148 L	9.75	3550	3150	7825	6945	900	900	130	130	14.5	950	313
●	●	315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	15.5	1014	312
●		315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	17	1076	312
●	●	315/80R22.5	20	156/150 L (154/150 M)	9.00	4000	3350	8820	7390	850	850	125	125	17	1076	312
●		325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	15	1228	325

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BT168

Suitable Conditions

Medium and long mileage truck running on paved and highway roads



- Low Heat Generation
- High Wear Resistance
- Long Mileage
- Low Heat Generation & Wear Resistance



 suitable



BF155

Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads



- Low Heat Generation
- High Wear Resistance
- Outstanding High Speed Performance
- Fuel efficiency



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	15	1054	279
•		12R22.5	18	152/149 L	9.00	3550	3250	7825	7165	930	930	135	135	16	1085	300

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		12R22.5	18	152/149 L	9.00	3550	3250	7830	7160	930	930	135	135	14.5	1085	300
•		235/75R17.5	18	143/141 L	6.75	2725	2527	6005	5675	860	860	125	125	13	797	233

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD175

Suitable Conditions

Medium and long mileage trucks running on paved and highway roads



- Low Heat Generation
- High Wear Resistance
- Excellent Grip
- Economy and Environment Friendly



 suitable



BD176


Suitable Conditions

Medium vehicles running on paved roads



- Excellent Grip
- Tear Resistance
- Long Mileage



 suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	148/145 L	8.25	3150	2900	6940	6395	850	850	123	123	20	1059	279
• •	11R22.5	16	146/143 K	8.25	3000	2725	6610	6010	850	850	123	123	20	1065	279
•	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	20	1096	300
•	12R22.5	18	152/149 L	9.00	3550	3250	7830	7160	930	930	135	135	20	1096	300
•	13R22.5	18	154/151 K	9.75	3750	3450	8270	7605	830	830	120	120	20.5	1124	320
• •	205/75R17.5	14	124/122 L	6.00	1600	1500	3525	3310	750	750	110	110	15	753	204
• •	215/75R17.5	16	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	15	767	211
• •	235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	15	797	233
•	225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	15	811	226
• •	245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	15.5	839	248
•	265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•	255/70R22.5	16	140/137 L	7.50	2500	2300	5510	5070	830	830	120	120	15.5	930	255
•	275/80R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	22	1012	276
• •	295/80R22.5	18	152/149 M	9.00	3550	3250	7825	7165	900	900	130	130	22	1044	298
• •	315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	20	1014	312
•	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	23	1076	312
•	315/80R22.5	20	156/150 L (154/150 M)	9.00	4000	3350	8820	7390	850	850	125	125	23	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	19.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD177

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Low Heat Generation
- High Wear Resistance
- Outstanding Handling and Brake Performance on Wet
- Excellent CPK



 suitable



BD165

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Low Heat Generation
- High Wear Resistance
- Excellent Grip
- Economy and Environment Friendly



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•		285/70R19.5	18	150/148	K	8.25	3350	3150	7390	6945	900	900	130	130	16	895	283
•		275/70R22.5	16	148/145	M	8.25	3150	2900	6940	6395	900	900	130	130	18	958	276
•		295/60R22.5	18	150/147	L	9.00	3350	3075	7390	6780	900	900	130	130	18	926	292
•		295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	19	1044	298
•		315/60R22.5	18	152/148	L	9.75	3550	3150	7825	6945	900	900	130	130	18	950	313
•		315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7390	900	900	130	130	19	1014	312
•		315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8050	850	850	125	125	20	1076	312
•		315/80R22.5	20	156/150 L (154/150 M)		9.00	4000	3350	8820	7390	850	850	125	125	20	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	17	1044	298
•		315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7385	900	900	130	130	18	1014	312
•		315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8050	850	850	125	125	18	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD186

Suitable Conditions

Medium and long mileage trucks running on paved and highway roads



- Tear Resistance
- Excellent Grip
- High Load Capacity



suitable



BD187/BD187^{II}

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Tear Resistance
- Excellent Grip
- High Load Capacity



suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•		275/70R22.5	16	148/145	M	8.25	3150	2900	6945	6395	900	900	130	130	20	958	276
•		285/70R19.5	18	150/148	K	8.25	3350	3150	7390	6945	900	900	130	130	16	896	286
•		315/60R22.5	18	152/148	L	9.75	3550	3150	7825	6945	900	900	130	130	20	950	313

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		*12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	20	1096	300
•		*295/80R22.5	18	152/149	L	9.00	3550	3250	7830	7160	900	900	130	130	20.5	1044	298

*12R22.5 applied to BD187^{II} . 295/80R22.5 applied to BD187

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD170

Suitable Conditions

Medium and long mileage truck running
on paved and highway roads



- Low Heat Generation
- High Wear Resistance
- Outstanding Handling and Brake Performance on Wet
- Excellent CPK



 suitable



BD171


Suitable Conditions

Medium and long mileage truck running
on paved and highway roads



- Tear and Cut Resistance
- Excellent Grip
- Excellent Durability



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		11R22.5	14	144/142	L	8.25	2800	2650	6175	5840	720	720	105	105	22.5	1059	279
•		11R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	22.5	1059	279
•		295/75R22.5	14	144/141	L	9.00	2800	2575	6175	5675	760	760	110	110	22.5	1020	298
•		295/75R22.5	16	146/143	L	9.00	3000	2725	6610	6005	830	830	120	120	22.5	1020	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		11R22.5	14	144/142	L	8.25	2800	2650	6175	5840	720	720	105	105	23.5	1059	279
•	•	11R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	23.5	1059	279
•		11R24.5	14	146/143	L	8.25	3000	2725	6610	6005	720	720	105	105	23.5	1110	279
•	•	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1110	279
•		295/75R22.5	14	144/141	L	9.00	2800	2575	6175	5675	760	760	110	110	23.5	1020	298
•		295/75R22.5	16	146/143	L	9.00	3000	2725	6610	6005	830	830	120	120	23.5	1020	298
•		285/75R24.5	14	144/141	L	8.25	2800	2575	6175	5675	760	760	110	110	23.5	1056	283
•		285/75R24.5	16	147/144	L	8.25	3075	2800	6780	6175	830	830	120	120	23.5	1056	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD173

Suitable Conditions

Medium and long mileage truck running on paved and highway roads



- Tear and Cut Resistance
- Excellent Grip
- Adapt to Various Road Conditions



● suitable



BT188

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Low Heat Generation
- High Wear Resistance
- Outstanding Handling and Brake Performance on Wet
- Excellent CPK



● suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		11R22.5	14	144/142	L	8.25	2800	2650	6175	5840	720	720	105	105	21.5	1059	279
•	•	11R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	21.5	1059	279
•		11R24.5	14	146/143	L	8.25	3000	2725	6610	6005	720	720	105	105	21.5	1110	279
•	•	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	21.5	1110	279
•		295/75R22.5	14	144/141	L	9.00	2800	2575	6175	5675	760	760	110	110	21.5	1020	298
•		295/75R22.5	16	146/143	L	9.00	3000	2725	6610	6005	830	830	120	120	21.5	1020	298
•		285/75R24.5	14	144/141	L	8.25	2800	2575	6175	5675	760	760	110	110	21.5	1056	283
•		285/75R24.5	16	147/144	L	8.25	3075	2800	6780	6175	830	830	120	120	21.5	1056	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)				
						S	D	S	D				
•		435/50R19.5	20	160	J	14.00	4500	9920	900	130	12.5	931	438
•		445/45R19.5	20	160	J	15.00	4500	9920	900	130	13	895	446

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BT107

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Ultra Wear Resistance
- Excellent Stability on Handling
- Excellent Durability



 suitable



BT160


Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Low Heat Generation
- High Wear Resistance
- Outstanding Handling and Brake Performance on Wet
- Excellent CPK



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•	•	235/75R17.5	18	143/141	J	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
•	•	245/70R17.5	18	143/141	J	7.50	2725	2575	6005	5675	875	875	125	125	13	789	248
•		245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	13.5	839	248

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)				
						S	D	S	D				
•		385/55R22.5	20	160	K	12.25	4500	9920	900	130	14.5	996	386
•		385/65R22.5	20	160	K	11.75	4500	9920	900	130	15.5	1072	389
•	•	385/65R22.5	24	164	K	11.75	5000	11000	900	130	15.5	1072	389

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BT180

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Ultra Wear Resistance
- Long Mileage
- Excellent Durability



 suitable



BT161


Suitable Conditions

Medium and long mileage trucks running on paved roads and highways



- Ultra Wear Resistance
- Long Life
- High Load Capacity



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)				
•		385/65R22.5	20	160	K	11.75	4500	9920	900	130	17	1072	389
•	•	385/65R22.5	24	164	K	11.75	5000	11000	900	130	17	1072	389
•		425/65R22.5	20	165	K	12.25	5150	11400	830	120	16.5	1124	422

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
		S	D	S	D	S	D	S	D	S	D						
•		11.00R20	18	152/149	K	8.0	3550	3250	7830	7160	930	930	135	135	16	1085	293

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD218

ON & OFF ROAD DRIVE

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Tear Resistance
- Excellent Grip
- High Load Capacity



● suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		11.00R20	18	152/149	K	8.0	3550	3250	7830	7170	930	930	135	135	19.5	1096	293
•		12.00R20	20	156/153	K	8.5	4000	3650	8820	8050	900	900	130	130	21	1136	315
•		9.5R17.5	18	143/141	K	6.75	2725	2575	6005	5675	875	875	125	125	16.5	850	240
•		11R22.5	16	148/145	L	8.25	3150	2900	6940	6395	850	850	123	123	22.5	1059	279
•		12R22.5	18	152/149	K	9.00	3550	3250	7830	7160	930	930	135	135	20	1096	300
•		225/80R17.5	18	123/122	L	6.75	1550	1500	3415	3305	700	700	102	102	14	811	226
•		265/70R19.5	18	143/141	K	7.50	2725	2575	6005	5675	900	900	130	130	15	867	262
•		275/70R22.5	18	148/145	M	8.25	3150	2900	6940	6395	900	900	130	130	17	958	276
•		295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	19	1044	298
•	•	325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	125	125	20	1234	325

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD210

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Tear and Cut Resistance
- Excellent Grip
- Anti Damage on Tread



 suitable



BD280


Suitable Conditions

Dump truck tire drive position tire used for medium and short distances on mixed road surfaces



- Tear Resistance
- Anti Damage on Tread
- Strong Constructure



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•	•	12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	20	1096	300
•	•	13R22.5	18	154/151	K	9.75	3750	3450	8270	7605	830	830	120	120	22	1124	320
•	•	13R22.5	20	156/150	J	9.75	4000	3350	8820	7390	900	900	130	130	22.5	1124	320
•	•	315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8045	850	850	125	125	22	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•	•	11R22.5	16	148/145	K	8.25	3150	2900	6945	6395	840	840	120	120	19	1059	279
•	•	12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	20	1096	300
•	•	13R22.5	20	156/150	J	9.75	4000	3350	8820	7390	900	900	130	130	20	1124	320
•	•	295/80R22.5	18	152/149	K	9.00	3550	3250	7825	7165	900	900	130	130	18	1044	298
•	•	315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8045	850	850	125	125	20.5	1076	312
•	•	315/80R22.5	20	156/150 J (154/150 K)	K	9.00	4000	3350	8820	7390	850	850	125	125	20.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD260

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Tear Resistance
- Excellent Grip
- High Load Capacity



suitable



BD216

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Tear and Cut Resistance
- Excellent Grip
- Avoid Damage on Tread



suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		7.00R16LT	14	118/114	L	5.50F	1320	1180	2910	2600	770	770	110	110	14	785	200
•		7.50R16LT	14	122/118	L	6.00G	1500	1320	3310	2910	770	770	110	110	16	815	215
•		8.25R16LT	16	128/124	K	6.50H	1800	1600	3970	3530	770	770	110	110	16	865	235
•		8.25R20	16	139/137	K	6.5	2430	2300	5360	5070	930	930	135	135	17.5	974	236
•		10.00R20	18	149/146	K	7.5	3250	3000	7165	6610	930	930	135	135	18.5	1065	278
•		11.00R20	18	152/149	K	8.0	3550	3250	7830	7170	930	930	135	135	19.5	1096	293
•		12.00R20	18	154/151	K	8.5	3750	3450	8270	7610	830	830	120	120	21	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		11R22.5	16	146/143	K	8.25	3000	2725	6610	6005	830	830	120	120	24.5	1059	279
•		11R24.5	16	149/146	K	8.25	3250	3000	7160	6610	830	830	120	120	24.5	1110	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BLG19

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Tear Resistance
- Excellent Grip
- Adapt to Various Road Conditions



● suitable



BD278/BD278H

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Tear and Cut Resistance
- Excellent Grip
- Adapt to Various Road Conditions



● suitable



Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	9.5R17.5	18	143/141 K	6.75	2725	2575	6005	5675	875	875	125	125	17	850	240
•	265/70R19.5	18	143/141 K	7.50	2725	2575	6005	5675	900	900	130	130	15	873	262
•	325/95R24	20	160/157 K	9.00	4500	4125	9920	9090	900	900	130	130	20	1228	325
•	8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	15.5	865	235
•	8.25R20	16	139/137 K	6.5	2430	2300	5360	5070	930	930	135	135	17	974	236
•	9.00R20	16	144/142 K	7.0	2800	2650	6170	5840	900	900	130	130	18	1030	259
•	10.00R20	18	149/146 K	7.5	3250	3000	7165	6610	930	930	135	135	19	1065	278
•	11.00R20	18	152/149 K	8.0	3550	3250	7830	7170	930	930	135	135	20	1096	293
•	12.00R20	18	154/151 K	8.5	3750	3450	8270	7610	830	830	120	120	21	1136	315
•	12.00R20	20	156/153 K	8.5	4000	3650	8820	8050	900	900	130	130	21	1136	315
•	12.00R24	20	160/157 K	8.5	4500	4125	9920	9090	900	900	130	130	20	1238	315
•	12.00R24	22	162/160 K	8.5	4750	4500	10470	9920	850	850	125	125	20	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11.00R20	18	152/149 J	8.0	3550	3250	7830	7160	930	930	135	135	19.5	1085	293
• •	12.00R20	20	156/153 J	8.5	4000	3650	8820	8050	900	900	130	130	20.5	1136	315
•	*12.00R20	20	156/153 J	8.5	4000	3650	8820	8050	900	900	130	130	20.5	1136	315

*12.00R20 applied to BD278H

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD215

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Tear and Cut Resistance
- High Stability on Handling



 suitable



BD212


Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Tear Resistance
- Good Grip
- Adapt to Various Road Conditions



 suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11.00R20	18	152/149 K	8.0	3550	3250	7830	7160	930	930	135	135	17.5	1085	293
•	12.00R20	20	156/153 K	8.5	4000	3650	8820	8050	900	900	130	130	18	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG~2.2lbs

Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11.00R20	16	150/147 K	8.0	3350	3075	7390	6780	830	830	120	120	18	1085	293
•	11.00R20	18	152/149 K	8.0	3550	3250	7830	7160	930	930	135	135	18	1085	293

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG~2.2lbs

ALL-POSITION

BA202


Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads



- Tear Resistance
- Adapt to Various Road Conditions
- Excellent CPK



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		10.00R20	16	146/143 K	7.5	3000	2725	6610	6010	830	830	120	120	16	1054	278
•		11.00R20	16	150/147 K	8.0	3350	3075	7390	6780	830	830	120	120	17	1085	293
•		11.00R20	18	152/149 K	8.0	3550	3250	7830	7160	930	930	135	135	17	1085	293
•		12.00R20	22	158/155 K	8.5	4250	3875	9370	8540	970	970	140	140	17	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BA267

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Tear Resistance
- Reduce Stone Trapping
- High Load Capacity



 suitable



BA226


Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



- Tear Resistance
- Excellent Grip
- Adapt to Various Road Conditions



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		215/75R17.5	18	135/133	L	6.00	2180	2060	4805	4540	860	860	125	125	15	773	211
•		235/75R17.5	18	143/141	L	6.75	2725	2575	6005	5675	860	860	125	125	15	797	233
•		265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	15	867	262
•		275/80R22.5	18	149/146	L	8.25	3250	3000	7160	6610	900	900	130	130	18.5	1012	276
•		295/80R22.5	18	152/149	L	9.00	3550	3250	7825	6945	900	900	130	130	18	1044	298
•		10.00R20	18	149/146	K	7.5	3250	3000	7165	6610	930	930	135	135	16	1054	278
•		11.00R20	18	152/149	K	8.0	3550	3250	7830	7170	930	930	135	135	17	1096	293

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)				
						S	D	S	D				
•		385/65R22.5	24	164	K	11.75	5000	11000	900	130	17.5	1072	389
•	•	425/65R22.5	20	165	K	12.25	5150	11400	830	120	17.5	1124	422
•		445/65R22.5	20	169	K	13.00	5800	12800	900	130	17.5	1150	444

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BA111

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Ultra Wear Resistance
- Long Life
- High Load Capacity



 suitable



BA115


Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Tear and Cut Resistance
- Good Grip
- Excellent Durability



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		6.50R16LT	12	110/105 L	5.50F	1060	925	2335	2040	670	670	97	97	10.5	750	185
•		7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	205
•	•	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	805	200
•		8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	12.5	855	235

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	12	785	200
•		7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	13	815	215
•		8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	13	855	235
•		8.25R20	16	139/137 K	6.5	2430	2300	5360	5070	930	930	135	135	14	974	236

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BLR01

Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads



- Good Handling
- Adapt to Various Road Conditions
- Excellent CPK



● suitable



BA122

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Ultra Wear Resistance
- Excellent Stability on Handling



● suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
• •	11R22.5	16	148/145 M	8.25	3150	2900	6945	6395	840	840	120	120	16	1054	279
•	12R22.5	18	152/148 K	9.00	3550	3150	7825	6945	850	850	125	125	16.5	1085	300
•	13R22.5	18	154/150 L	9.75	3750	3350	8270	7390	850	850	125	125	16	1124	320
•	11R24.5	16	149/146 M	8.25	3250	3000	7160	6610	830	830	120	120	16	1104	279
•	295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	17.5	1044	298
•	315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8045	850	850	125	125	14	1076	312
•	325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	15.5	1228	325
•	7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	205
• •	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	805	200
•	8.25R16LT	14	126/122 L	6.50H	1700	1500	3750	3310	670	670	97	97	12.5	855	235
•	8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	12.5	855	235
•	9.00R20	16	144/142 K	7.0	2800	2650	6170	5840	900	900	130	130	15	1019	259
•	10.00R20	16	146/143 K	7.5	3000	2725	6610	6010	830	830	120	120	16	1054	278
•	10.00R20	18	149/146 K	7.5	3250	3000	7165	6610	930	930	135	135	16	1054	278
•	11.00R20	16	150/147 K	8.0	3350	3075	7385	6780	830	830	120	120	16.5	1085	293
•	11.00R20	18	152/149 K	8.0	3550	3250	7830	7170	930	930	135	135	16.5	1085	293
•	12.00R20	18	154/151 K	8.5	3750	3450	8270	7610	830	830	120	120	17	1125	315
•	12.00R24	20	160/157 K	8.5	4500	4125	9920	9100	900	900	130	130	15.5	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6010	830	830	120	120	18	1054	279
•	12R22.5	18	152/149 L	9.00	3550	3250	7825	7165	930	930	135	135	18	1085	300
•	13R22.5	18	154/151 K	9.75	3750	3450	8270	7605	830	830	120	120	18	1124	320
•	275/70R22.5	18	148/145 K	8.25	3150	2900	6940	6395	900	900	130	130	17	958	276
•	295/80R22.5	18	152/149 M	9.00	3550	3250	7825	7165	900	900	130	130	17.5	1044	298
•	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	17	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BA125

Suitable Conditions

Medium and long mileage trucks running on paved roads and highways



- Tear and Cut Resistance
- Anti Damage on Tread
- Outstanding High Speed Performance



 suitable



BA220


Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads



- Ultra Wear Resistance
- High Stability on Handling
- High Load Capacity



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		12R22.5	18	152/149 L	9.00	3550	3250	7825	7165	930	930	135	135	15.5	1085	300
•		10.00R20	18	149/146 K	7.5	3250	3000	7165	6610	930	930	135	135	15	1054	278
•		11.00R20	18	152/149 K	8.0	3550	3250	7830	7170	930	930	135	135	15.5	1085	293
•		12.00R20	20	156/153 K	8.5	4000	3650	8820	8050	900	900	130	130	16	1125	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		11R22.5	16	146/143 K	8.25	3000	2725	6610	6005	830	830	120	120	17.5	1054	279
•		11R22.5	16	148/145 L	8.25	3150	2900	6940	6395	850	850	123	123	17.5	1054	279
•	•	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	18	1085	300
•		13R22.5	18	154/151 K	9.75	3750	3450	8270	7610	830	830	120	120	18	1124	320
•	•	13R22.5	20	156/150 K	9.75	4000	3350	8820	7390	900	900	130	130	18	1124	320
•		11R24.5	14	146/143 K	8.25	3000	2725	6610	6005	720	720	105	105	17.5	1104	279
•		11R24.5	16	149/146 K	8.25	3250	3000	7160	6610	830	830	120	120	17.5	1104	279
•		295/80R22.5	18	152/149 K	9.00	3550	3250	7825	6945	900	900	130	130	18	1044	298
•		315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8050	850	850	125	125	17	1076	312
•		315/80R22.5	20	156/150 L(154/150 M)	9.00	4000	3350	8820	7390	850	850	125	125	17	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BA106

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Tear and Cut Resistance
- Anti Impact
- High Load Capacity



 suitable



BA162


Suitable Conditions

Medium and long mileage truck running on paved and highway roads



- Ultra Wear Resistance
- Avoid Damage on Tread
- Excellent CPK
- Outstanding High Speed Performance



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	125	125	14.5	1228	325
•		12.00R24	20	160/157	K	8.5	4500	4125	9920	9090	900	900	130	130	14.5	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		11R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	15.5	1054	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BA105

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Tear and Cut Resistance
- Excellent Grip
- Avoid Damage on Tread



● suitable



BA127

Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



- Tear and Cut Resistance
- Excellent Grip
- Avoid Damage on Tread



● suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	125	125	16	1228	325
•		12.00R24	20	160/157	K	8.5	4500	4125	9920	9090	900	900	130	130	16	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	125	125	15.5	1228	325

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

OFF ROAD

BD273

Suitable Conditions

Short mileage vehicles running on unpaved roads



- Tear and Cut Resistance
- Anti Impact
- Excellent Grip



● suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		12.00R20	20	156/153 D	8.5	4000	3650	8820	8050	900	900	130	130	30	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD285

Suitable Conditions

Short mileage vehicles running on unpaved roads



- Tear and Cut Resistance
- Anti Impact
- Excellent Grip



 suitable



BD189


Suitable Conditions

Short mileage vehicles running on unpaved roads



- Cut Resistance
- Excellent Grip
- Avoid Damage on Tread



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		7.50R16LT	14	122/118	D	6.00G	1500	1320	3310	2910	770	770	110	110	18.5	816	215
•		8.25R16LT	16	128/124	D	6.50H	1800	1600	3970	3530	770	770	110	110	20	865	235
•		10.00R20	18	149/146	D	7.5	3250	3000	7165	6610	930	930	135	135	23.5	1065	278
•		11.00R20	16	150/147	D	8.0	3350	3075	7390	6780	830	830	120	120	24	1096	293
•	•	12.00R20	22	158/155	D	8.5	4250	3875	9370	8540	970	970	140	140	24	1136	315
•		8.25R20	16	139/137	D	6.5	2430	2300	5360	5070	930	930	135	135	20	974	236
•		9.00R20	16	144/142	D	7.0	2800	2650	6170	5840	900	900	130	130	22	1030	259

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		11R22.5	16	148/145	G	8.25	3150	2900	6940	6395	850	850	123	123	24	1059	279
•		11R22.5	18	149/146	G	8.25	3250	3000	7160	6610	930	930	123	123	23.5	1054	279
•		12R22.5	18	152/149	G	9.00	3550	3250	7830	7160	930	930	135	135	23.5	1096	300
•		13R22.5	18	156/150	G	9.75	4000	3350	8820	7390	875	875	125	125	24	1124	320
•		13R22.5	20	156/150	G	9.75	4000	3350	8820	7390	875	875	125	125	23.5	1136	320
•		11R24.5	16	149/146	G	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1110	279
•		275/70R22.5	16	148/145	J	8.25	3150	2900	6940	6395	900	900	130	130	23.5	958	276
•	•	295/80R22.5	18	152/149	J	9.00	3550	3250	7830	7160	900	900	130	130	24	1044	298
•		315/80R22.5	20	157/154	G	9.00	4125	3750	9090	8270	900	900	130	130	23.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD266

Suitable Conditions

Short mileage vehicles running on unpaved roads



- Excellent Grip
- Anti Damage on Tread
- Improved Handling



● suitable



BD270

Suitable Conditions

Short mileage vehicles running on unpaved roads



- Tear and Cut Resistance
- Excellent Grip
- High Load Capacity



● suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		12.00R24	18	160/157 D	8.5	4500	4125	9920	9090	900	900	130	130	31	1238	315
•		12.00R24	20	160/157 F	8.5	4500	4125	9920	9090	900	900	130	130	31	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		7.50R16LT	14	122/118 D	6.00G	1500	1320	3310	2910	770	770	110	110	17.5	815	215
•		8.25R16LT	16	128/124 D	6.50H	1800	1600	3970	3530	770	770	110	110	17.5	865	235
•		8.25R20	16	139/137 D	6.5	2430	2300	5360	5070	930	930	135	135	19.5	974	236

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BLM16

Suitable Conditions

Short mileage vehicles running on unpaved roads



- Tear and Cut Resistance
- Excellent Grip
- Strong Constructure



 suitable



BD263


Suitable Conditions

Short mileage vehicles running on unpaved roads



- Tear and Cut Resistance
- Anti Impact
- Excellent Grip



 suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		13R22.5	20	156/150 J	9.75	4000	3350	8820	7390	900	900	130	130	21	1124	320
•		10.00R20	18	149/146 K	7.5	3250	3000	7165	6610	930	930	135	135	21	1065	278
•		11.00R20	16	150/147 K	8.0	3350	3075	7385	6780	830	830	120	120	21	1096	293
•		11.00R20	18	152/149 K	8.0	3550	3250	7830	7170	930	930	135	135	21	1096	293
•		12.00R20	22	158/155 D	8.5	4250	3875	9370	8540	970	970	140	140	21	1136	315
•		12.00R24	20	160/157 K	8.5	4500	4125	9920	9090	900	900	130	130	21.5	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		12.00R20	20	156/153 G	8.5	4000	3650	8820	8050	900	900	130	130	24	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD265

Suitable Conditions


Short mileage vehicles running on unpaved roads



- Tear and Cut Resistance
- Anti Impact
- Excellent Grip
- High Load Capacity



● suitable

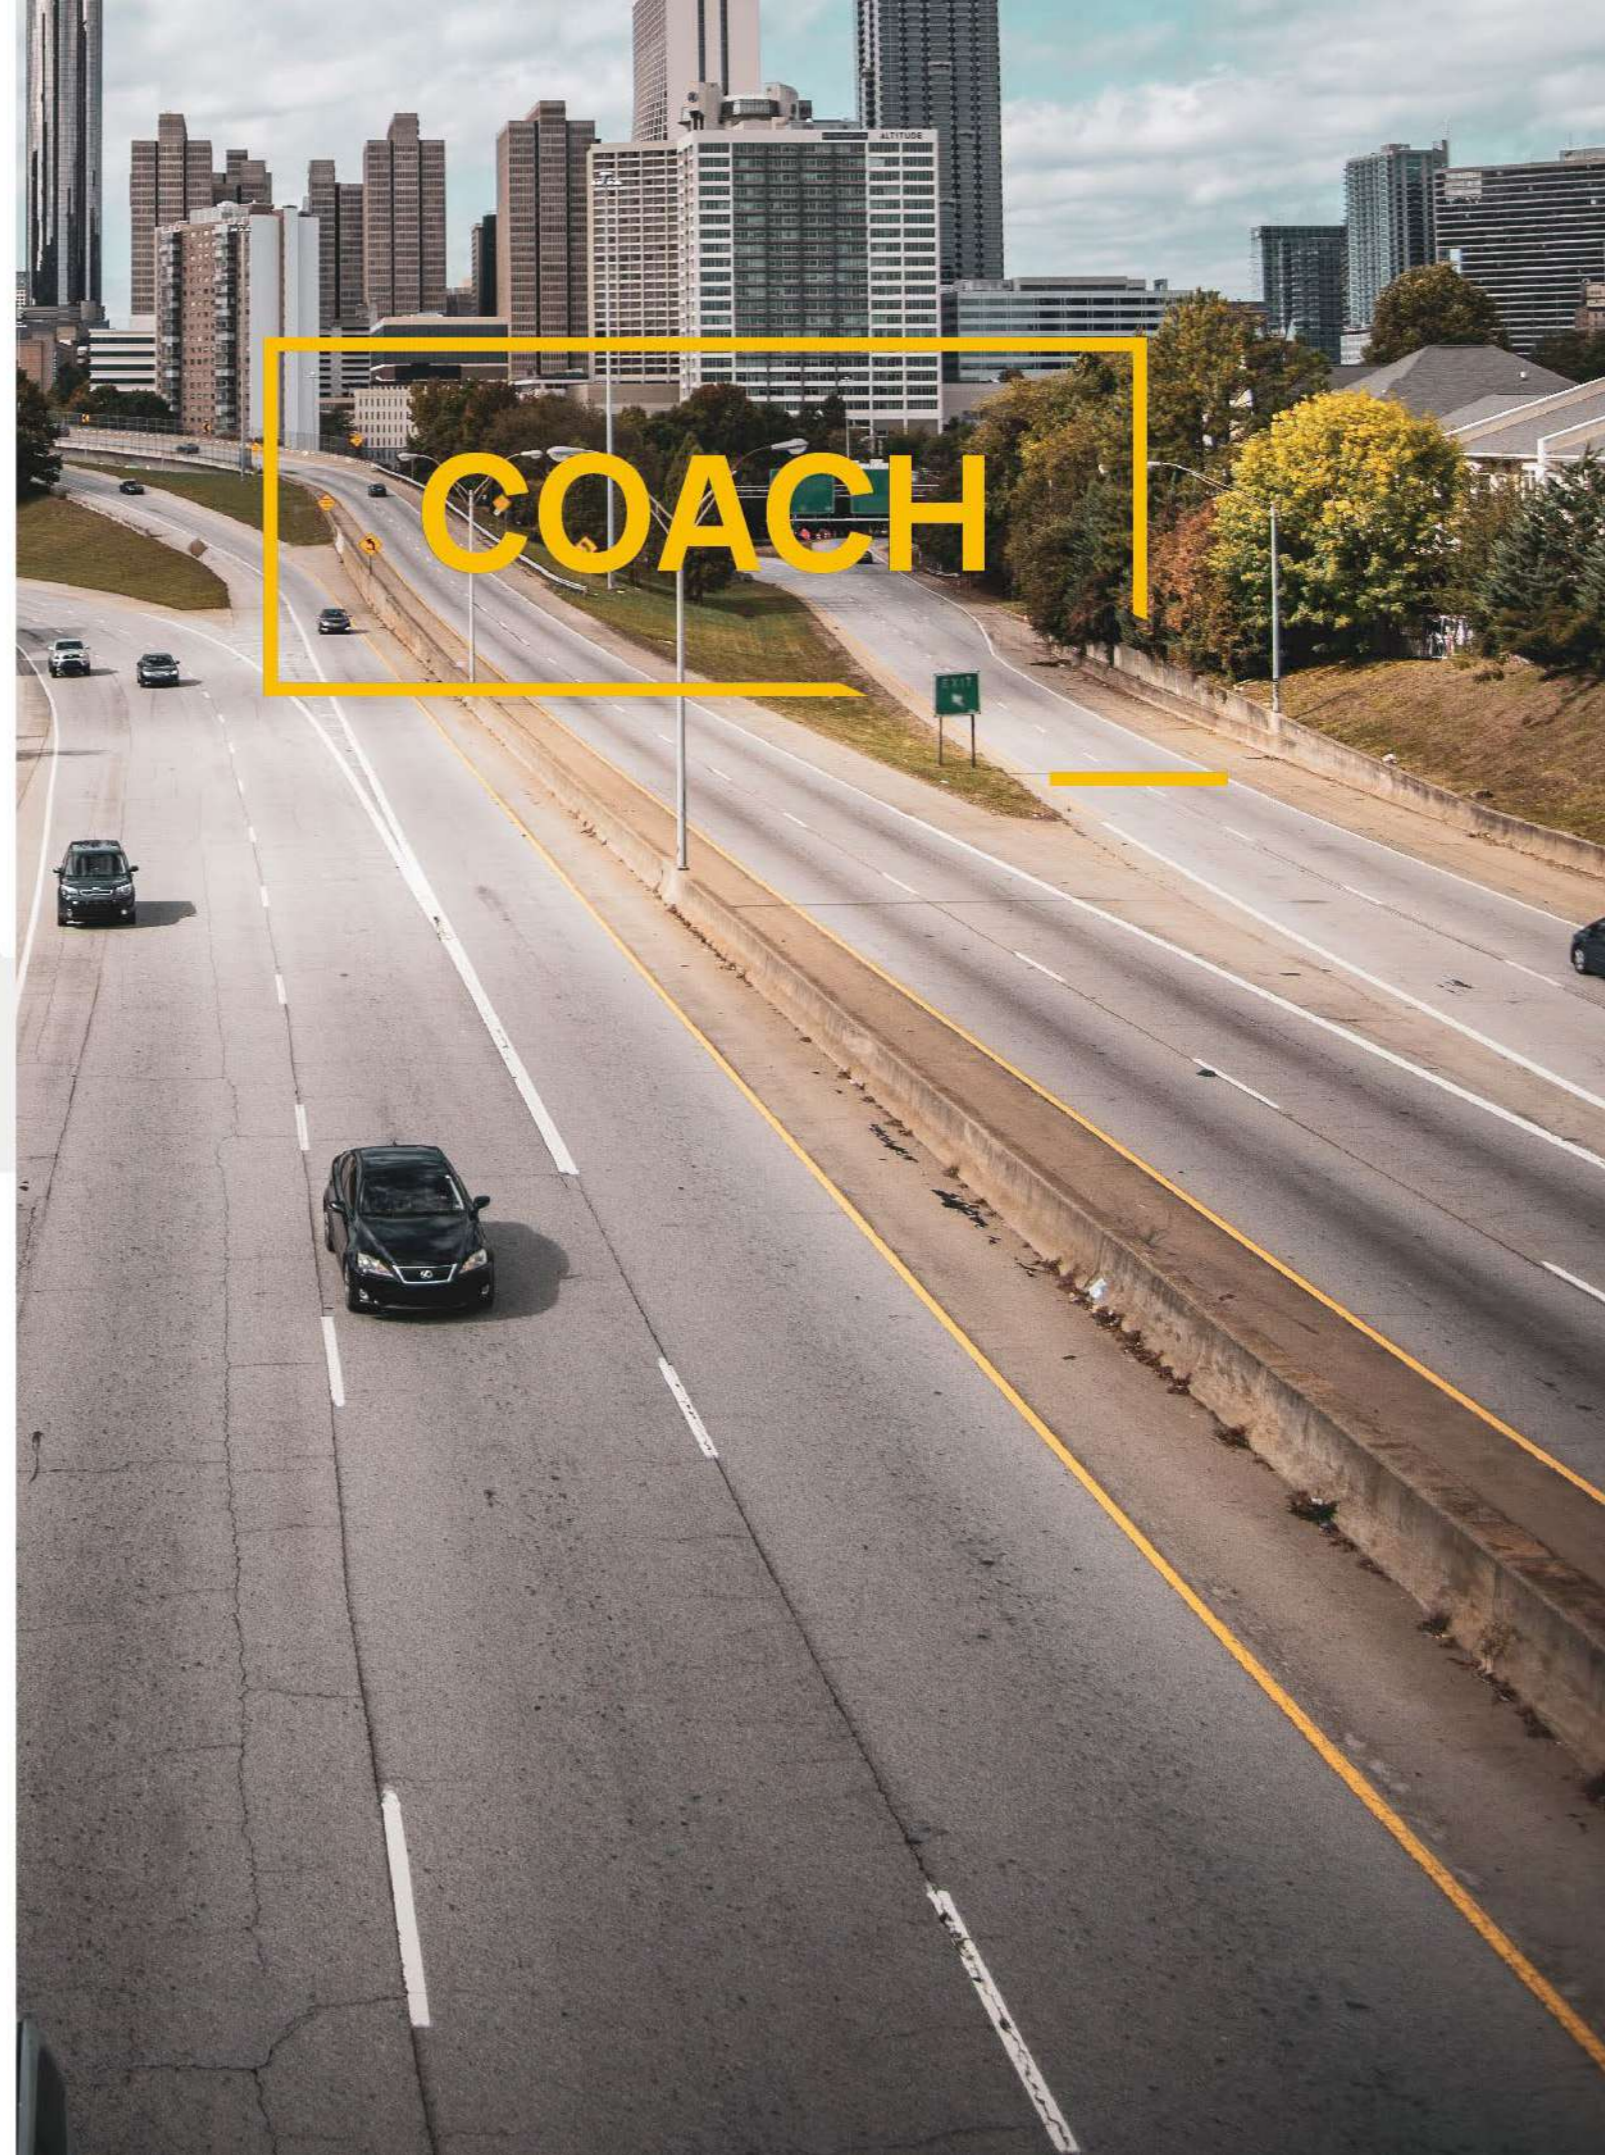

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		12.00R20	20	156/153 D	8.5	4000	3650	8820	8050	900	900	130	130	23	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BC121

Suitable Conditions



- Ultra Wear Resistance
- Superior Ride Comfort
- Outstanding Handling and Brake Performance on Wet




● suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		295/80R22.5	18	152/149	M	9.00	3550	3250	7825	7165	930	930	135	135	15	1044	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

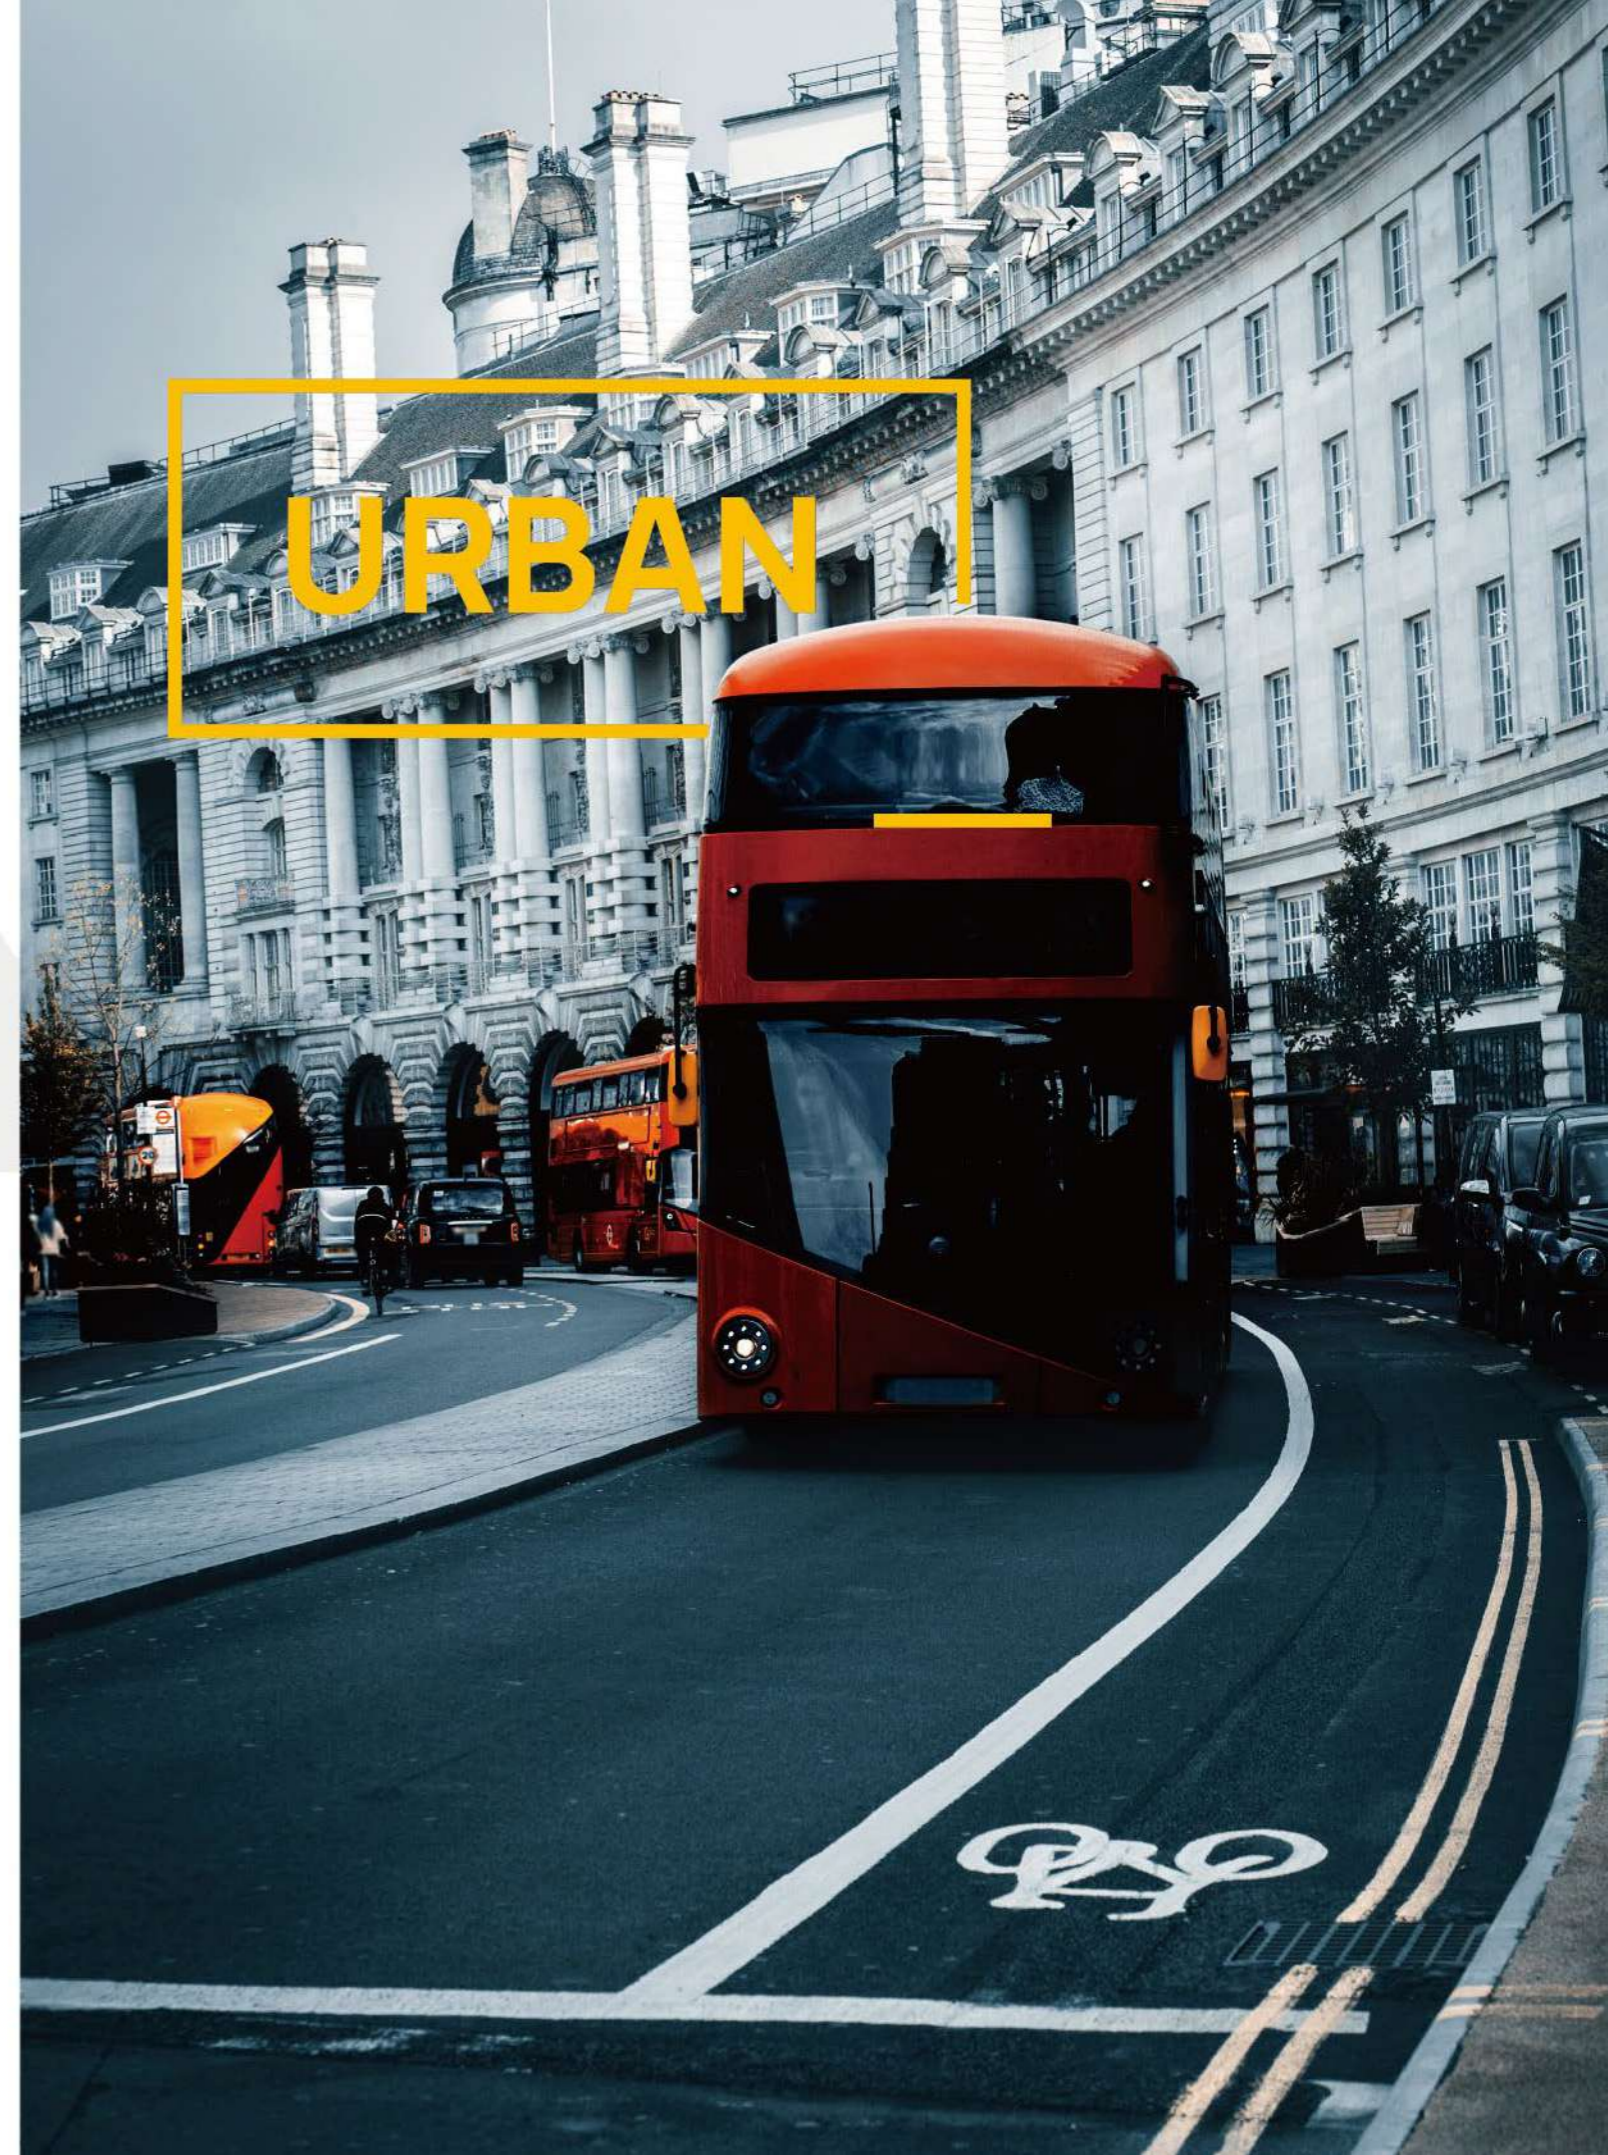

BU123

Suitable Conditions

Short mileage vehicles running on paved roads



- Ultra Wear Resistance
- Damage Resistance On Sidewall
- Long Life



● suitable



BU551

Suitable Conditions

Short mileage vehicles running on paved roads



- Excellent Grip
- Adapt to Various Road Conditions
- Excellent Durability



● suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•	•	11R22.5	16	148/145 J	8.25	3150	2900	6940	6395	850	850	123	123	20	1054	279
•	•	275/70R22.5	18	152/148 J	8.25	3150	2900	6940	6395	900	900	130	130	20.5	958	276
•	•	305/70R22.5	20	153/150 J	9.00	3650	3350	8050	7390	900	900	130	130	20.5	1000	305

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG~2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	148/145 L	8.25	3150	2900	6940	6395	850	850	123	123	20.5	1054	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG~2.2lbs

BLC58

Suitable Conditions

Short mileage vehicles running on paved roads



- Ultra Wear Resistance
- Damage Resistance On Sidewall
- Excellent Durability



● suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		10R22.5	16	144/142 L	7.50	2800	2650	6175	5840	900	900	130	130	16.5	1020	254

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



BW290

Suitable Conditions

Medium and long mileage truck running on paved and highway roads



- ✓ Excellent Low-temperature Performance
- ✓ Anti Damage on Tread
- ✓ Superior Traction on Snow



● suitable



BW291

Suitable Conditions

Medium and long mileage truck running on paved and highway roads



- ✓ Excellent Low-temperature Performance
- ✓ Excellent CPK
- ✓ Excellent Grip



● suitable



Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
●		11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	20	1054	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
●		11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	20	1054	279
●		225/80R17.5	14	123/122 L	6.75	1550	1500	3415	3305	700	700	102	102	16	811	226
●		245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	19	839	248
●		265/70R19.5	16	140/138 L	7.50	2500	2360	5510	5205	760	760	110	110	20	867	262
●		275/80R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	19	1012	276
●		275/80R22.5	18	151/148 J	8.25	3450	3150	7160	6940	900	900	130	130	19	1012	276

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



JINYU TIRE GROUP

HQ Add:10th Floor,Block A,Platinum Plaza,No.5 Wenling Road,Laoshan District,Qingdao,China

Tel No.:0086-400-600-7809

E-mail:TBR2@jinyutires.com

Website:www.blackliontires.cn